



Non Contact Tonometer

NT-530 / 510




THE ART OF EYE CARE

Non Contact Tonometer NT-530 / 510


■ Softer and Quieter Air Puff

The NIDEK innovative technology enhances APC (Automatic Puff Control) to the next stage. It reduces the noise and air intensity. With the enhanced APC, the NT-530 / 510 achieves a softer and quieter air puff than ever, which allows the patient's more comfort.

Without APC

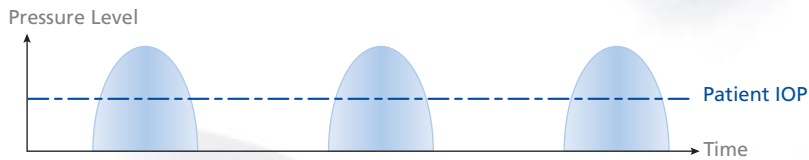


With APC

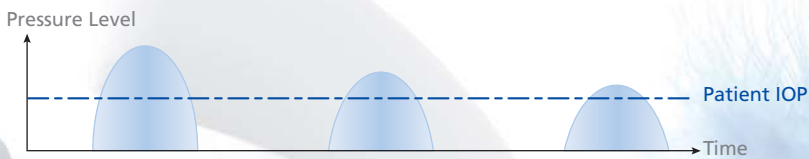

■ 3-D Auto Tracking, Auto Shot, and Auto Complete

Based on a long experience in developing examination equipment, NIDEK incorporates the unique auto complete in the Non Contact Tonometer. The NT-530 automatically detects the most appropriate value and completes the measurement. The combination of auto complete with the world renowned 3-D auto tracking and auto shot provides the operator with the most ease, comfort, and accuracy on all measurements.

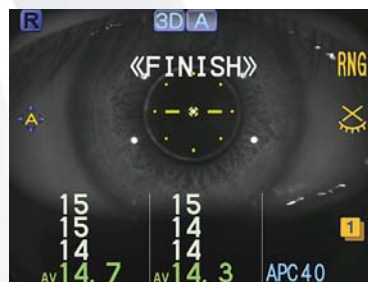

Function Model	Auto Tracking		Auto Shot	Auto Complete
	X - Y - Z	Y		
NT-530	○		○	○
NT-510		○	○	


○ : Standard



■ IOP Compensation by Corneal Thickness*

By entering patient's central corneal thickness, the operator can compensate the patient's IOP. The IOP compensation provides the correlation between the IOP and central corneal thickness, as LASIK patient's IOP changes between pre and post operation.

*Available for the NT-530

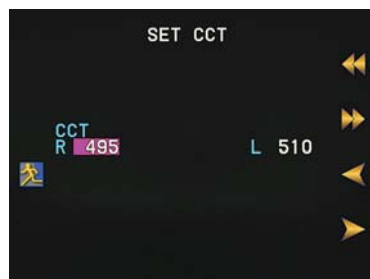

Entered patient's corneal thickness



Compensated patient's IOP

■ Attractive Tilttable 5.7-inch Color LCD



The clear 5.7-inch color LCD with tilting function offers easy operation even for a standing operator.

■ Motorized Chinrest



■ Printer with Easy Loading & Auto Detachment



■ Patient Safety



The "TOO CLOSE" message on the LCD and beep sound alert the operator that the patient's eye is too close to the air nozzle. Besides the safety stopper, these alarm functions enhance the patient's safety.

NT-530 / 510 Specifications

Model	NT-530	NT-510
Measurement range	1 to 60 mmHg	←
Measurement range setting	APC40, APC60 (APC = Automatic Puff Control), 40, 60	←
Working distance	11 mm	←
Eye fixation	Inner fixation light	←
IOP compensation by corneal thickness	Manually entering corneal thickness	Not available
Auto tracking	X-Y-Z directions	Y direction
Auto shot	Available	←
Auto complete	Available	Not available
Display	Tiltable 5.7-inch color LCD	←
Printer	Thermal line printer with easy loading and auto cutter	←
Interface	RS-232C, LAN, USB	←
Power supply	AC 100 to 240 V, 50 / 60 Hz	←
Power consumption	100 VA	←
Dimensions / Mass	260 (W) x 481 (D) x 457 (H) mm / 19 kg 10.2 (W) x 18.9 (D) x 18.0 (H)" / 42 lbs.	←

Product / Model name: Non Contact Tonometer NT-530 / 510

Caution: U.S. Federal Law restricts this device to sale, distribution, and use by or on the order of a physician or other licensed eye care practitioner.

Specifications may vary depending on circumstances in each country.

Specifications and design are subject to change without notice.



HEAD OFFICE
(International Div.)

34-14 Maehama, Hiroishi
Gamagori, Aichi 443-0038,
JAPAN
TEL: +81-533-67-8895
URL: <http://www.nidek.com>

[Manufacturer]

TOKYO OFFICE
(International Div.)

3F Sumitomo Fudosan Hongo
Bldg., 3-22-5 Hongo, Bunkyo-ku,
Tokyo 113-0033, JAPAN
TEL: +81-3-5844-2641
URL: <http://www.nidek.com>

NIDEK INC.

47651 Westinghouse Drive,
Fremont, CA 94539, U.S.A.
TEL: +1-510-226-5700
+1-800-223-9044
(US only)
URL: <http://usa.nidek.com>

NIDEK S.A.

Europarc,
13 rue Auguste Perret,
94042 Créteil, FRANCE
TEL: +33-1-49 80 97 97
URL: <http://www.nidek.fr>

NIDEK TECHNOLOGIES S.R.L.

Via dell'Artigianato,
6/A, 35020 Albignasego (Padova),
ITALY
TEL: +39 049 8629200/8626399
URL: <http://www.nidektechnologies.it>

NIDEK (SHANGHAI) CO., LTD.

#915, China Venturtech Plaza,
819 Nanjing West Rd, Jing An
District, Shanghai 200041,
CHINA
TEL: +86 021-5212-7942
URL: <http://www.nidek-china.cn>

NIDEK SINGAPORE PTE. LTD.

51 Changi Business Park
Central 2, #06-14, The
Signature 486066,
SINGAPORE
TEL: +65 6588 0389

